




The two decimal counters and 7 decoders and 96 transistors form a 1 of 96 counter/decoder. There could be 100 columns, but only 96 are used (0-95).

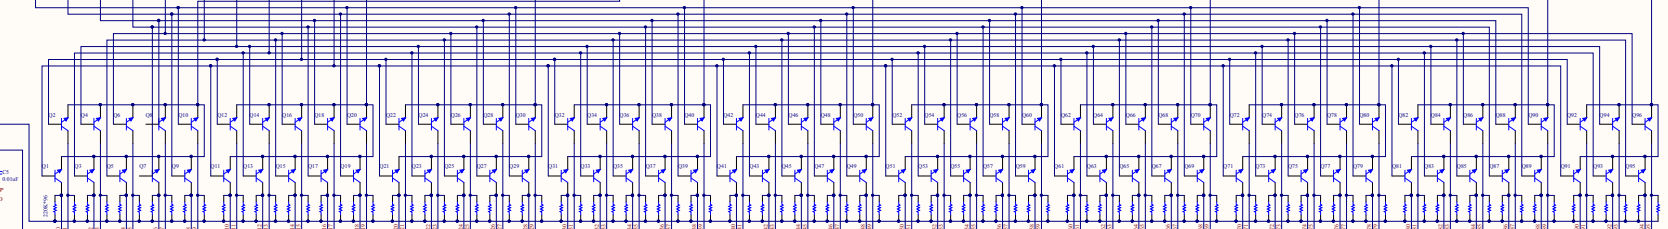

PG-12 are 10V driver hybrids. They contain an 8 bit shift register, level translators, and 10V output drivers.

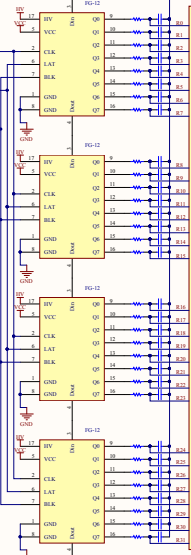

# 96 by 32 Neon Display

Reverse electrode brings glow back to left side.  
Glow electrode keep at glow at the end of the tube so when the scan starts, the tube will glow.